

ASSEMBLY AND INSTRUCTION MANUAL

MODEL 0218 SIAMO

© 2018 KURT BEIER & KATI QUINGER



Optional with seat adjustment
(continuously motorised adjustment)
up to reclining position





Practical shelf,
optionally with cushion



With comfortable stool


Use of functional headrest:

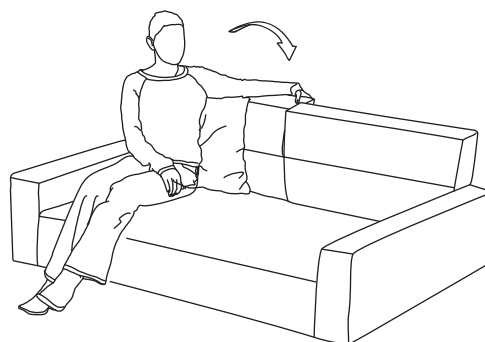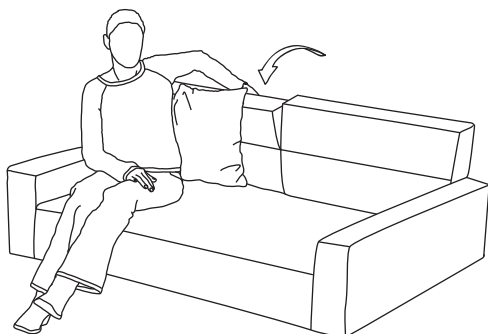

Regardless of the motorised adjustment, the upper back can be adjusted manually.

Motorised seat adjustment (for types with seat adjustment):

1. Connect cable A (fixed at seat element) to provided transformer and plug it into socket.
2. Press button B and C at remote control to move seat continuously up to relax position. The upholstery moves forwards or backwards.

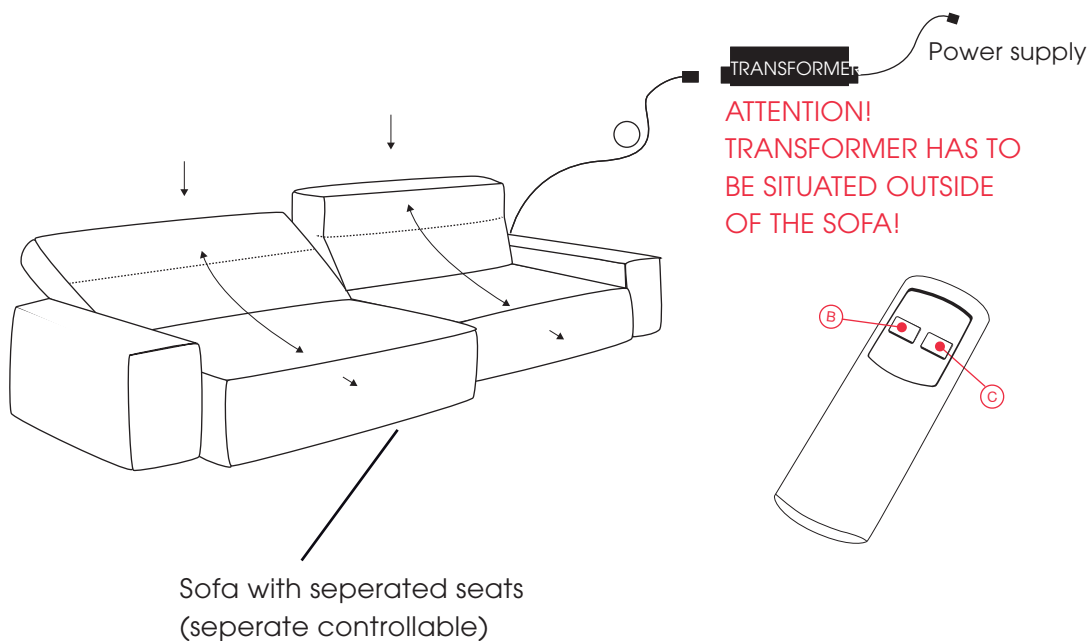

ATTENTION! DO NOT SIT ON THE BACK!

Motorised seat adjustment - Programming of transmitter and receiver

Delivery condition: already synchronised

November 2021

Brief instruction, Pairing-Method:

Should a new start-up of remote control be necessary the wireless communication with the control/motor must be established. Proceed as follows:



1. Press pairing buttons A at receiver 2 x until the LED indicates. The pairing process is active for about 10 seconds.

2. Press simultaneous button B and C at the transmitter until the green LED at the receiver vanishes. This confirms a successful pairing process.

Note: For the pairing process the distance between transmitter and receiver should be less than 2 metres.


The programming is completed, the transmitter is now ready for operation. If the motor doesn't start while pressing, release the button and press again. If necessary retry the process.

The programming is completed, the transmitter is now ready for operation. If the motor doesn't start while pressing, release the button and press again. If necessary retry the process.




Put drive systems into operation successively, don't operate several systems simultaneous. Otherwise the remote control cannot be assigned clearly by control/motor.


FUNKI - how it works:




1. Take the cushion at its upper side and put the cushion on your knees with the zipper on the bottom. The seamless side faces you.



2. Move the upper part of the cushion towards yourself until the final position is reached.



3. Now you are able to move the upper part backwards until the upper part of the cushion will click into place in the zero position.



4. Now put the cushion in the preferred position (e.g. in the back, seamless side at the front and zipper at the bottom). You are able to choose different locking positions depending on your preference and position by slowly pulling the upper part of the cushion towards yourself.